


Wire & Cable Conduit



Series 122
MPI Cable Guard



Series 123
Conduit Tubing

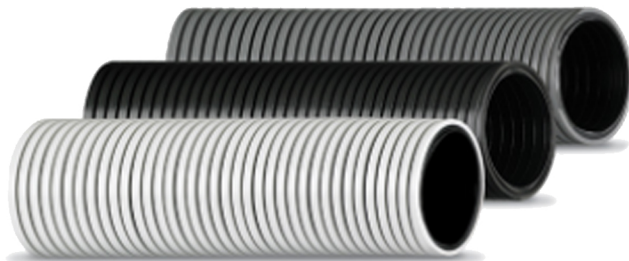

Series 126, 127, & 128
Outboard Rigging Tubing

WIRE & CABLE CONDUIT

Series 122 MPI Cable Guard



Our premium light-weight wire, cable, and hose conduit features a corrugated exterior for maximum flexibility. Ultra smooth interior surface provides easy installation of hose, cables or wire harnesses. Manufactured with a crush resistance polyethylene helix. Formulated for maximum resistance to UV and ozone. Temperature range is -40°F to 160°F (-40°C to 71°C).

Specifications

SKU	I.D.	MM	O.D.	MM	Wall Thickness	Bend Radius (in.)
122-1120	1-1/2"	38.1	1.820"	38.1	0.012	2.5"
122-3000	3"	76.2	3.300"	76.2	0.012	4.0"

Series 122

SKU	I.D.	MM	Bulk Length (ft)	Bulk Length (m)	Color	Weightlbs/ft (kg/m)
122-1120	1-1/2"	38.1		30.5	Black	0.14/.064
122-3000	3"	76.2		15.2	Black	0.27/.112

Series 123 Conduit Tubing

Series 123 – Slit Black
Series 123U – Unslit Black
Series 123W – Slit White



Our premium wire and cable conduit tubing creates a quality appearance in wiring systems. Corrugated, slit and unslit polyethylene provides excellent conduit for multiple wire or cable routing. An ideal product for hose abrasion protection. Flexible and specially formulated in accordance with UL94 V-2 tests for flammability.



Meets tough ABYC standards. Is formulated for maximum resistance to UV and ozone. Temperature range is -40°F to 200°F (-40°C to 93°C)

Specifications

SKU	I.D.	MM	O.D.	MM	Wall Thickness	Weightlbs/ft (kg/m)	Bulk Length (ft)
123-0140	1/4"	6.3	.400"	10.2	0.004	TBD	3200'
123-0140W	1/4"	6.3	.400"	10.2	0.004	TBD	3200'
123-0380	3/8"	9.5	.526"	13.4	0.005	TBD	1800'
123-0380W	3/8"	9.5	.526"	13.4	0.005	TBD	1800'
123-0120	1/2"	12.7	.681"	17.3	0.005	TBD	1100'
123-0120W	1/2"	12.7	.681"	17.3	0.005	TBD	1100'
123-0580	5/8"	16.1	.839"	21.3	0.005	TBD	750'
123-0580W	5/8"	16.1	.839"	21.3	0.005	TBD	750'
123-0340	3/4"	19.1	.989"	25.1	0.005	TBD	500'
123-0340W	3/4"	19.1	.989"	25.1	0.005	TBD	500'
123-0340U	3/4"	19.1	.989"	25.1	0.005	TBD	450'
123-1000	1"	25.4	1.294"	32.9	0.006	TBD	300'
123-1000W	1"	25.4	1.294"	32.9	0.006	TBD	300'
123-1180U	1-1/8"	28.6	1.413"	35.9	0.006	TBD	200'
123-1140	1-1/4"	31.8	1.500"	38.1	0.006	TBD	200'
123-1140U	1-1/4"	31.8	1.500"	38.1	0.006	TBD	200'
123-1140W	1-1/4"	31.8	1.500"	38.1	0.006	TBD	200'
123-1120	1-1/2"	38.1	1.947"	49.5	0.006	TBD	100'
123-1120U	1-1/2"	38.1	1.947"	49.5	0.006	TBD	100'
123-1120W	1-1/2"	38.1	1.947"	49.5	0.006	TBD	100'



SKU	I.D.	MM	O.D.	MM	Wall Thickness	Weightlbs/ft (kg/m)	Bulk Length (ft)
123-2000	2"	50.8	2.388"	60.7	0.011	TBD	100'
123-2000U	2"	50.8	2.388"	60.7	0.011	TBD	100'
123-2000W	2"	50.8	2.388"	60.7	0.011	TBD	100'


Series 123

SKU	I.D.	Bulk Length (ft)	Bulk Length (m)	Color
123-0140	1/4"	3200'	975.36	Black
123-0140W	1/4"	3200'	975.36	White
123-0380	3/8"	1800'	548.64	Black
123-0380W	3/8"	1800'	548.64	White
123-0120	1/2"	1100'	335.28	Black
123-0120W	1/2"	1100'	335.28	White
123-0580	5/8"	750'	228.6	Black
123-0580W	5/8"	750'	228.6	White
123-0340	3/4"	500'	152.40	Black
123-0340W	3/4"	500'	152.40	White
123-0340U	3/4"	450'	137.16	Black
123-1000	1"	300'	91.44	Black
123-1000W	1"	300'	91.44	White
123-1180U	1-1/8"	200'	60.96	Black
123-1140	1-1/4"	200'	60.96	Black
123-1140U	1-1/4"	200'	60.96	Black
123-1140W	1-1/4"	200'	30.48	White

SKU	I.D.	Bulk Length (ft)	Bulk Length (m)	Color
123-1120	1-1/2"	100'	30.48	Black
123-1120U	1-1/2"	100'	30.48	Black
123-1120W	1-1/2"	100'	30.48	White
123-2000	2"	100'	30.48	Black
123-2000U	2"	100'	30.48	Black
123-2000W	2"	100'	30.48	White

Series 126, 127, & 128 Outboard Rigging Tubing

Series 126 – Gray
Series 127 – Black
Series 128 – White

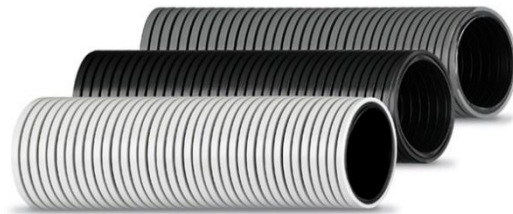

Our premium outboard rigging tubing has a crush resistant proprietary PE blend construction, which provides excellent flexing and abrasion protection. Material is resistant to bilge acids, fuel solutions, and ultra violet rays. For all bracket mounted outboard motors. Is formulated for maximum resistance to UV and ozone. Temperature range is -40°F to 160°F (-40°C to 71°C).

Specifications

SKU	I.D.	MM	O.D	Wall Thickness	Weightlbs/ft (kg/m)
126-2000	2"	50.8	3.375"	0.032	TBD
127-2000	2"	50.8	3.375"	0.032	TBD
128-2000	2"	50.8	2.375"	0.032	TBD
127-2120	2-1/2"	63.5	2.875"	0.032	TBD
127-3000	3"	76.2	2.875"	0.032	TBD
128-2120	2-1/2"	60.3	2.375"	0.032	TBD

Series 126, 127, & 128



SKU	I.D.	Bulk Length (ft.)	Bulk Length (m)	Color
126-2000	2"	50'	15.2	Gray
127-2000	2"	50'	15.2	Black
128-2000	2"	50'	15.2	White
127-2120	2-1/2"	50'	15.2	Black
127-3000	3"	50'	15.2	Black
128-2120	2-1/2"	50'	15.2	White